


Tiara
YACHTS

4800 CONVERTIBLE

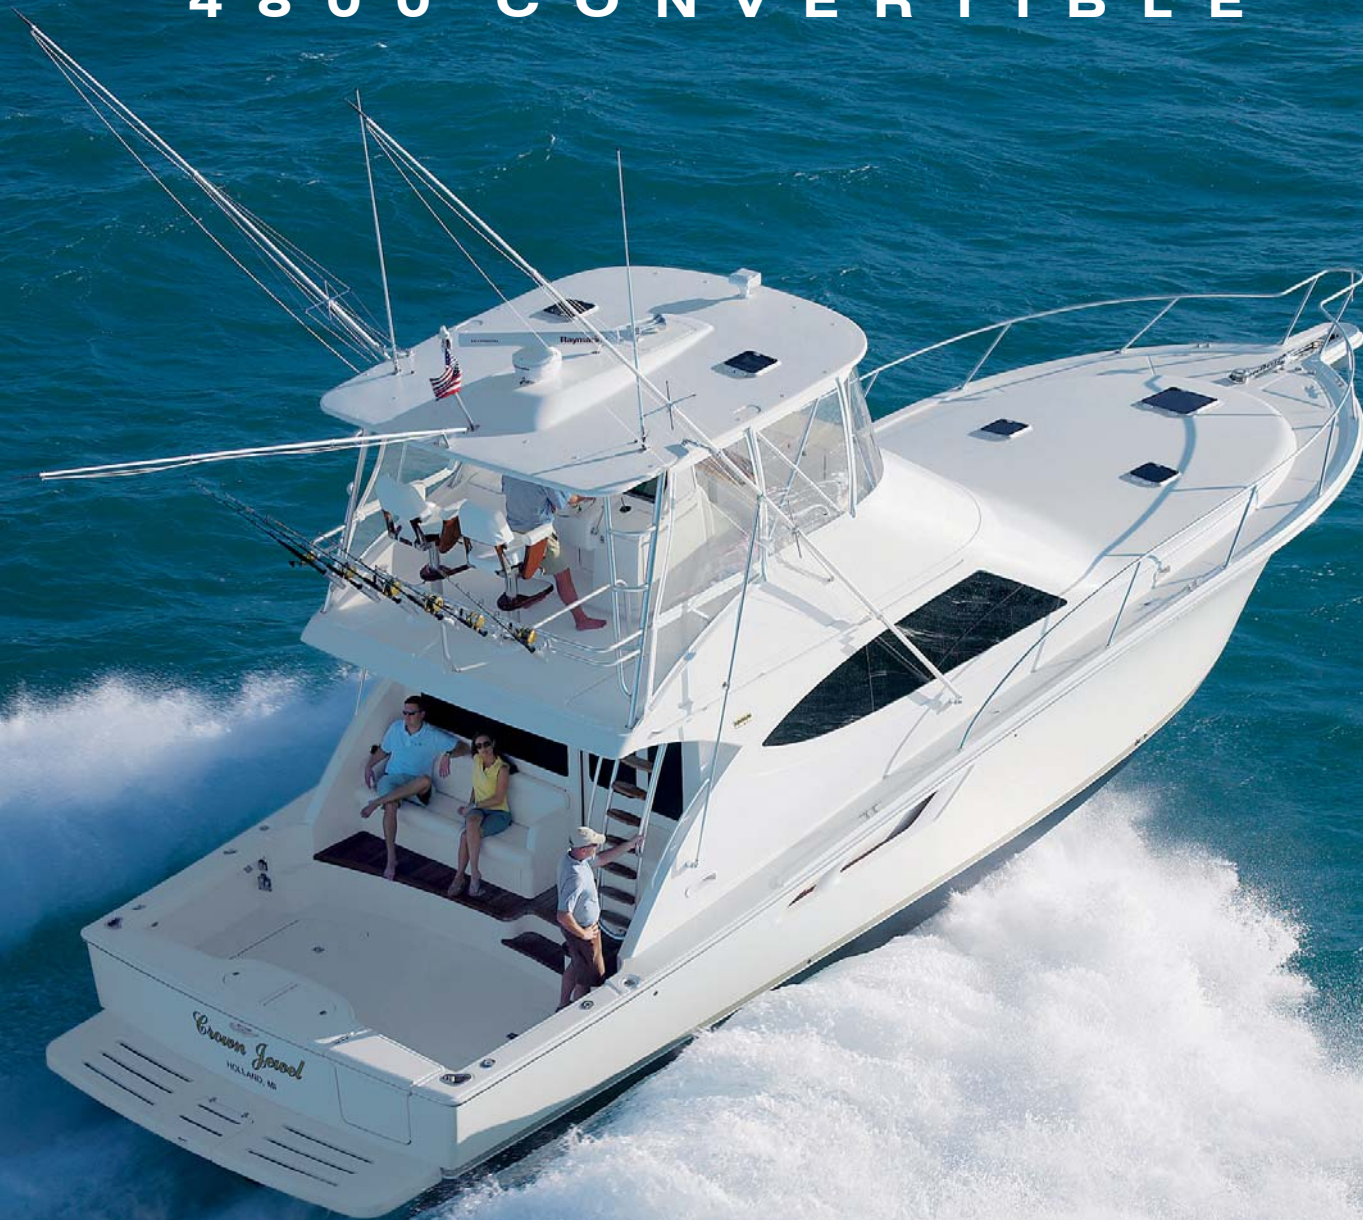

STANDARDS / OPTIONS
2012 MODEL YEAR

EFFECTIVE DECEMBER 19, 2011

PRINTED IN USA

4800 CONVERTIBLE

STANDARD EQUIPMENT

SPECIFICATIONS

L.O.A. without Standard Pulpit ...
48'5" - 14.76 meters

L.O.A. with Standard Pulpit ...
51'5" - 15.67 meters

L.O.A. with Standard Pulpit & Optional
30" Swim Platform ... 53'11" - 16.43 meters

Beam ... 15'11" - 4.85 meters

Draft (with Props) ... 4'0" - 1.22 meters

Approximate Dry Weight ...
45,012 lbs. - 20,417 kg

Height from Waterline to Top of
Optional Hardtop... 17'5" - 5.3 meters

Standard Fuel Capacity ...
1,000 U.S. gallons - 3,785.41 liters

Water Capacity ...
150 U.S. gallons - 567.81 liters

Holding Tank Capacity ...
50 U.S. gallons - 189.27 liters

Sleeping Accommodations ... 7

Cockpit Size ... 140 sq. ft. - 13 sq. meters

Deadrise at Transom ... 14.8°

HULL AND DECK

- Tiara Yachts' transferable limited warranties: five years on hull, deck & fiberglass fuel tank; two years on accessories. Exclusions apply - refer to 2012 warranty statement for specific details & coverage areas.
- Fresh white gelcoat hull & deck
- Imron® bootline (Carbon is standard)
- Hull constructed w/ a gelcoat outer layer, balsa cored hullsides and bottom, w/ fiberglass skin coat hand-laid using AME® premium vinyl ester resin. Closed mold technology w/ AME® premium vinyl ester resin is used for the remainder of the hull process.
- Deck constructed w/ a gelcoat outer layer, balsa coring, & laminated w/ AME® 1000 resin using closed mold technology
- Tiara custom diamond pattern non-skid deck & cockpit surfaces
- Wood & foam core stringers, encapsulated by hand-laid fiberglass, are integrated to the hull
- Gelcoated bilge
- Bronze seacocks on all underwater thru-hull fittings
- Molded-in hullside engine room ventilation
- Bennett Marine® 24V hydraulic recessed trim tabs
- Three (3) Bomar® cast aluminum & acrylic opening forward deck hatches w/ adjusters & built-in Ocean Air® screens & privacy covers
- Molded-in fiberglass bow pulpit w/ S.S. roller
- One-piece welded 1 1/4" brushed aluminum bow rail w/ pulpit, staff & Tiara burgee

- Flush forward anchor rode locker w/ overboard drain
- Automatic rope/chain anchor windlass system w/ operation from foredeck foot pedal & remote switch at helm. Includes one (1) 10" S.S. foredeck cleat, 50' chain rode, 200' rope rode, & Delta® 55 lb. galvanized anchor.
- White rubrail w/ 316L S.S. cap
- Eight (8) 12" S.S. cleats for lines

LOWER COCKPIT

- Starboard entry to salon w/ sliding tinted glass door
 - Port mezzanine seat w/ insulated cooler tub under seat
 - Engine room access door in mezzanine seat
 - Teak-covered cockpit step to mezzanine seat & salon entry door. Insulated cooler tub under companion step, & storage tub under seat step.
 - Ladder or stairway to flybridge -- see options
 - Molded-in steps to deck walkways, port & starboard, w/ safety handrails above
 - Fiberglass covering boards w/ upholstered coaming bolsters
 - Four (4) Lee® rod holders in covering boards, two port & two starboard
 - Two (2) corner cast S.S. hawse pipes
 - Two (2) 6" S.S. cockpit fender cleats
 - Cockpit LED courtesy lighting with remote control
 - 120V GFI outlet, port
 - Cockpit shower, hot & cold water
 - Fresh water washdown outlet w/ S.S. fittings & 25 ft. coiled blue hose
 - Raw water washdown outlet w/ S.S. fittings & 25 ft. coiled yellow hose
 - Self-draining cockpit w/ scupper drains
 - Two (2) insulated flush floor storage boxes, one (1) port and one (1) starboard, w/ split lids & hinges. Large floor box includes drain.
 - Aft lazarette hatch
 - Aluminum backing plate, 24" x 24", laminated in center of cockpit floor (access via lazarette hatch)
 - Molded-in, inward opening transom door & gate
- ### FLYBRIDGE
- TV antenna
 - Two (2) Release Marine® teak helm chairs w/ footrests
 - Forward center bench seat w/ storage underneath
 - Starboard lounge w/ top-access insulated cooler aft
 - Port lounge w/ top-access storage aft

- Clarion® AM/FM/CD stereo w/ four (4) flybridge speakers, two lower cockpit speakers, & remote panel located in lower cockpit. Includes Clarion iPod /MP3 interface.

- Weather covers for helm console & helm chairs

INTERIOR

- Mold & mildew resistant vinyl hull and headliner treatment
- Teak interior - *NOTE: Variations in Teak wood grain are natural & cannot be controlled in the manufacturing process*
- Cable TV/phone outlet
- 120V outlets throughout
- 12V/24V DC lighting

SALON

- Teak hardwood floor
- Starboard lounge/dinette seating w/ storage below. Includes table w/ fixed pedestal.
- Port l-lounge seating with pull-out sleeper
- Manually operated blinds for port, starboard & aft windows
- 40" LCD TV mounted on a hi-lo actuator to conceal the TV when not in use. Includes iPod® / MP3/game port interface.
- Bose® Lifestyle 18 media/entertainment system w/ integrated DVD/CD player
- Marine Air Systems® 20,000 BTU air conditioner w/ reverse cycle heat (supplies salon & galley)

GALLEY / LOWER SALON HALLWAY

- Teak hardwood flooring in galley & teak steps to hallway; hallway is carpeted.
- Quartz galley countertop and backsplash
- Stainless steel undermount sink w/ hot/cold water faucet
- Three-burner surface mount electric cooktop w/ sea rails
- Forward upper cabinets w/ storage & microwave/convection oven
- Forward lower cabinets w/ storage
- Aft lower cabinets w/ safety handrail & concealed trash can
- Two Sub-Zero® drawer-style refrigerator/freezer units; one unit includes ice maker
- Exhaust fan
- Drawer storage and sub-floor access underneath hallway steps (hinge lift with gas spring)
- Hallway closet with bi-fold door

MASTER STATEROOM

- Carpeted floor
- Full frame door separating master stateroom from hallway


- Private sliding door entry to head
- Manually actuated queen pedestal berth w/ deep quilted innerspring mattress, quilt, two (2) pillow shams, & ten (10) throw pillows
- Storage under berth
- Two (2) nightstands w/ storage
- Hanging locker
- Upper hullside storage cabinets, port
- Two (2) reading lights, independently switched
- 19" LCD TV
- 12V DVD player
- Clarion® AM/FM/CD stereo w/ two (2) Polk Audio® in-ceiling speakers, iPod®/MP3 interface
- Marine Air Systems® 12,000 BTU air conditioning w/ reverse cycle heat (supplies master stateroom & master head)

MASTER HEAD

- Tile flooring
- Full fiberglass head w/ shower sump pump & tempered glass window/door
- Corian® countertop w/ porcelain sink
- Mirrored vanity w/ storage above sink
- VacuFlush® toilet
- Exhaust fan
- Air conditioner discharge

FORWARD GUEST STATEROOM

- Carpeted floor
- Full frame door w/ entry from hallway
- Two (2) bunks, single upper/double lower, w/ innerspring mattresses, quilts, & two (2) pillow shams
- Storage under lower berth

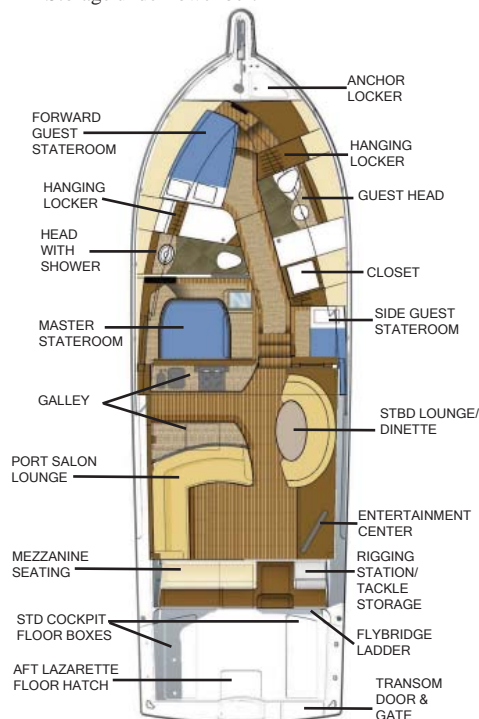

- Night stand integrated into cedar-backed hanging locker
- Three (3) reading lights, independently switched

GUEST HEAD

- Tile flooring
- Full frame door w/ entry from forward guest stateroom and hallway
- Full fiberglass head w/ shower sump pump & tempered glass shower door/window
- Corian® countertop w/ porcelain sink
- Mirrored vanity w/ storage above sink
- Lower vanity storage
- VacuFlush® toilet
- Exhaust fan
- Air conditioner discharge

SIDE GUEST STATEROOM

- Carpeted floor
- Full frame sliding entry door from hallway
- Two (2) bunks, upper and lower, w/ innerspring mattresses, quilts, & two (2) pillow shams
- Cedar-backed hanging locker
- Two (2) reading lights, independently switched
- Marine Air Systems® 14,000 BTU air conditioning w/ reverse cycle heat (supplies side guest stateroom, forward guest stateroom & guest head)

INSTRUMENTATION, EQUIPMENT AND SAFETY

- Tiara custom 12V/24V and 120V/240V electrical system. Master AC consolidated w/ salon monitoring panel with main DC panel in engine room
- One (1) 240V 50A 65' shore power cord w/ Glendinning® cord recoiler
- Cable TV and phone inlets/outlets w/ 65' dockside power cord
- TV and AM/FM radio antennas installed in the flybridge
- Onan® 13.5kw MDKBN generator w/ sound shield and ultra-quiet muffler (Onan 11.0kw MDKBN for 220v)
- Battery charger (1), 80 amp
- 12V/24V two bank battery system w/ batteries & battery switches (four (4) engine batteries & eight (8) house batteries)
- Battery parallel system w/ battery equalizer for 12V battery bank
- Reverse polarity indicator
- Electrical bonding system - hardware bonded to main DC return
- Zincs - trim tabs, transom & shafts
- Bronze axe head rudders & high-rake, high performance struts
- Aquamet® 22 Hi-Strength S.S. prop shafts
- Water cooled shaft logs w/ PSS® dripless shaft
- Two (2) propellers
- Sea Star® full power steering w/ 15" aluminum steering wheel
- Electronic engine controls w/ engine synchronizer and push-start ignition
- Helm instrument panel w/ MPD® electronic display. Separate fuel gauges and rudder position indicator.
- Beede® indicator LED's for aft bilge pump, mid bilge pump, forward bilge pump, & generator
- Ritchie® SuperSport SS-2000 compass
- High output alternators, 140 amps
- Clean & quiet engine room; includes fiberglass bulkhead covers/centerline floor/chine floor, sound tiles, insulation, vibration isolation, & fuel/water/air separators
- Six (6) 24V engine room lights
- Two (2) Racor® fuel filters/raw water intake strainers
- Plate mounted, thru-bolted engine system
- Five-port oil changing system for main engines, transmissions, & generator
- ProMariner® ProSafe FS galvanic isolator
- One (1) Delta T® 9" bilge blower fan
- Three (3) automatic/manual bilge pumps w/ monitors at helm & high-water alarm (2000 GPH each): One (1) forward, one (1) mid, & one (1) aft
- Two (2) composite fuel tanks, 500 gallons each, w/ electric gauges & fuel shut-off valve on top of tank
- Dockside water inlet
- One= (1) fresh water tank, 150 gallons
- Fresh water pressure system w/ Headhunter Excalibur® variable speed pump, 10 GPM
- One (1) holding tank, 70 gallons, w/ vent filter
- Fresh water tank/holding tank monitor
- One (1) water heater w/ exchanger, 20 gallons
- Kahlenberg® chrome dual trumpet air horn (shipped loose for dealer installation when hardtop not ordered)
- FE-241 agent automatic/manual fire extinguisher system in engine room (HFC-227ea agent for Europe)
- Five (5) handheld fire extinguishers
- Carbon monoxide detectors
- Smoke detectors
- Eight (8) 5/8" x 50' black dock lines
- Eight (8) Tiara life vests (domestic boats only)
- USCG safety & medical kit
- USCG/international LED navigation lighting (anchor light shipped loose for dealer installation)
- NMMA certified using ABYC standards
- International certification options available (European CE and others)

4800 CONVERTIBLE OPTIONAL EQUIPMENT

ENGINE GROUP (DIESELS)

- ▷ Twin CAT® C18 ACERT, 885 H.P.....1,428,400
- ▷ Twin CAT® C18 ACERT, 1,015 H.P....1,495,600
- ▷ Engine Chrome Package.....15,280

MECHANICAL GROUP

- ▷ Glendinning® side mount engine controls on flybridge console4,460
- ▷ Trolling valves.....13,200
- ▷ 30 Amp shore cord adapter and transformer.....2,620
- ▷ Reverse osmosis water maker, 19 GPH....24,480
- ▷ Cool air system for flybridge, 16,000 BTUs.....5,940
- ▷ Auxiliary generator with sound shield.....19,800
 - Onan® 5.0kw MDKBH, 120V/60hz
 - Onan® 4.0kw MDKBH, 220V/50hz
- ▷ Auxiliary gauge panel, engine room.....3,920
- ▷ Bilge crash pumps.....3,440
- ▷ All chain windlass (in lieu of std rope windlass).....2,700
- ▷ Bow thruster, 24V.....15,340
- ▷ Macerator for waste system.....1,420
- ▷ Fresh water washdown, flybridge.....580
- ▷ Anchor locker washdown with S.S. fittings (may order both).....580 ea.
 - ▷ Raw water
 - ▷ Fresh water

HULL, DECK, & COCKPIT GROUP

- ▷ 30" Swim platform w/ built-in ladder.....4,290
- ▷ Underwater Lights (2), Xenon 12V/50W.....4,320
- ▷ Fixed center salon window with electrically operated blinds.....5,280
- ▷ Forward deck sun pad.....2,480
- ▷ Cockpit carpet - lower cockpit only.....600
 - ▷ Sand
 - ▷ Charcoal
- ▷ Refrigerator/freezer (may order both locations)
 - ▷ Cockpit mezzanine seat.....7,260
 - ▷ Cockpit step.....5,860
- ▷ Transom options (clean transom std)
 - ▷ Fold-down lounge.....4,120
 - ▷ Baitwell, 80 gallons.....4,280
- ▷ Teak table, cockpit mezzanine seat.....4,180
- ▷ Gunnel storage (may order both).....1,080 ea.
 - ▷ Port locker (includes storage hooks)
 - ▷ Starboard locker (includes storage hooks & rod storage racks/rings)
- ▷ Teak decking, lower cockpit sole.....32,980
- ▷ Flybridge access
 - ▷ Fish style ladder.....Std
 - ▷ Cruise style stairway (eliminates cockpit rigging station/tackle storage).....5,260
- ▷ Access hatch for ladder or stairway to flybridge.....1,580

- ▷ Teak package, helm.....6,740
- ▷ Refrigerator/freezer, flybridge.....5,860
- ▷ Teak table, flybridge.....3,980
- ▷ Sun lounge, flybridge.....2,880

WEATHER GROUP

- ▷ Cockpit aft curtain (White Stamoid®).....2,760
- ▷ Hardtop, Tournament style.....41,260
 - Molded-in spreader lights (aft)
 - Six-rod holder rocket launcher (aft)
 - Wire raceways for electronics
 - Imtra® LED anchor light
 - Imtra® red/white/blue LED lighting w/ remote control

** The below options are only available with the optional tournament-style hardtop:*

- ▷ Rainier® hardtop enclosures (front, sides, & aft drop, White Stamoid®).....25,920*
- ▷ Console shelter.....4,360*
- ▷ Hardtop hatches (2).....1,380*

FISHING FEATURES/OPTIONS

- ▷ Macerator for standard cockpit flush floor boxes.....840
- ▷ Teak Isle® drawer unit for cockpit rigging station (n/a with cruise-style stairway flybridge access).....2,480
 - Cutting board w/ tool holder
 - Bag storage
 - Leader holders
 - Lure tubes
- ▷ Bow rail
 - ▷ Brushed aluminum.....Std
 - ▷ Stainless Steel.....780
- ▷ Rod storage under flybridge lounge seating (may order both).....620 ea.
 - ▷ Port
 - ▷ Starboard
- ▷ Rod storage (may order both).....400 ea.
 - ▷ Forward guest stateroom
 - ▷ Side guest stateroom

** Asterisked options are only available with the optional tournament style hardtop:*

- ▷ Rupp® outriggers
 - ▷ Deck mount, 32 ft.....13,480*
 - ▷ Bridge mount, 28 ft (west-coast style).....12,980*
- ▷ Rupp® center outrigger, 15 ft.....1,580*
- ▷ Teaser reels.....12,000*

ELECTRONICS GROUP

- ▷ Garmin® electronics package
 - ▷ Two (2) 15" displays.....46,640
- ▷ 2kw transducer lieu 1kw w/ Garmin® electronics pkg.....POR
- ▷ Camera (only available w/ optional Garmin® package; may order both locations).....1,420 ea.
 - ▷ Engine room
 - ▷ Cockpit
- ▷ ACR® RCL100 remote spotlight.....2,630*

INTERIOR GROUP

- ▷ Electrically operated blinds for side and aft windows, salon.....9,860
- ▷ Salon L-lounge, port
 - ▷ Aft facing with pull-out sleeper.....Std
 - ▷ Forward facing with pull-out sleeper...N/C
- ▷ Ice maker, salon.....2,380
- ▷ Cabin sole, upper salon/dinette/galley
 - ▷ Solid teak.....Std
 - ▷ Solid teak and holly.....1,540
- ▷ Cabin sole, hallway/staterooms (carpet std)
 - ▷ Solid teak.....6,480
 - ▷ Solid teak and holly.....6,480
- ▷ Stackable washer/dryer, hallway closet....5,540
- ▷ 19" LCD TV (may order both).....1,580 ea.
 - ▷ Forward guest stateroom
 - ▷ Side guest stateroom
- ▷ Dishwasher, galley.....3,060
- ▷ Garbage disposal, galley.....780
- ▷ Security safe, master stateroom.....780

COLOR SELECTIONS

- ▷ Hull color (*Please specify color below Fresh White gelcoat is standard*)
 - ▷ _____
 - ▷ Colored gelcoat.....19,750
 - ▷ Imron® non-metallic paint.....23,500
 - ▷ Imron® metallic paint.....POR
- ▷ Imron® custom color bootline (*Please specify color below - Carbon is standard*).....2,120
 - ▷ _____
- ▷ Anti-fouling bottom paint - Awlgrip® Awlstar.....3,920
 - ▷ Black
 - ▷ Navy blue

Interior Fabric

- ▷ Caribbean
- ▷ Tuscany
- ▷ Jet Set

Ultraleather™

- ▷ Brisa French Vanilla
- ▷ Brisa Distressed Iron
- ▷ Brisa Ink
- ▷ Brisa Black Onyx
- ▷ Cashew

Galley Quartz Countertops:

- ▷ Michelangelo
- ▷ Royal Gold
- ▷ Bianco Carrara

Master/Guest Head Corian® Countertops:

- ▷ Oat
- ▷ Graylite

Tile Flooring - Please specify by location for master head & guest head

- ▷ Cotto Mist
- ▷ Asian Black
- ▷ Egyptian Beige

Carpet Flooring (for hallway and staterooms):

- ▷ Lille
- ▷ Gray

MISCELLANEOUS

- ▷ Cradle.....5,980
- ▷ **DO NOT WINTERIZE** (available as temperatures allow)
- ▷ International conversion package *Not available on domestic boats. Pricing available thru international dealers. Specify country below:*
 - ▷ _____

NOTE: Specifications are based on available information at time of printing. Actual specifications may vary. Tiara Yachts reserves the right to change product line specifications, equipment, color schemes, and pricing, or to discontinue models at any time without notice or obligation.



725 EAST 40TH STREET HOLLAND, MI 49423-5392 USA
(616) 392-7163 • Fax (616) 394-7466 • www.tiaryachts.com

Please contact your dealer for freight, prep, and commissioning charges along with tax, title, and registration fees as these are not included.